


STRAIGHT CONNECTOR PUSH-IN TYPE GERADE EINSCHRAUBVERSCHRAUBUNG STECKBAR

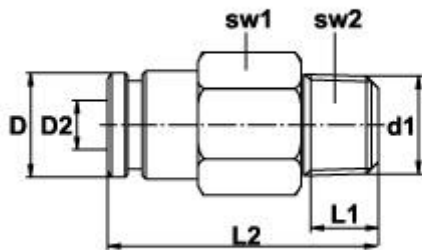

Betriebsdruck: ca. 60 bar / Work pression ca.60 bar

Art. Nr.	D	D1	D2	sw1	sw2	L1	L2
CK.SK.GE-04M06	9	6 x 1	4	10	3	7,5	18,5
CK.SK.GE-04M08X100	9	8 x 1	4	10	2,5	8	23
CK.SK.GE-04M10X100	9	10 x 1	4	10	3	8	20
CK.SK.GE-04R02	9	1/8 BSP	4	11	3	8	20
CK.SK.GE-04R02NPT	9	1/8 NPT	4	11		8	20
CK.SK.GE-04R04UNF	9	1/4 – 28 UNF	4	11		8	20
CK.SK.GE-06M06X100	12	6 x 1	6	12	3	7,5	21,5
CK.SK.GE-06M08X100	12	8 x 1	6	12	2,5	8	25,5
CK.SK.GE-06M10X100	12	10 x 1	6	12	4	8	25,5
CK.SK.GE-06R02	12	1/8 BSP	6	12	4	8	22
CK.SK.GE-06R02NPT	12	1/8 NPT	6	12		8,5	21,5
CK.SK.GE-06R04UNF	12	1/4 – 28 UNF	6	12		6	23,5