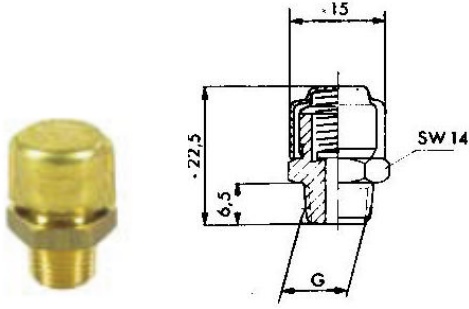
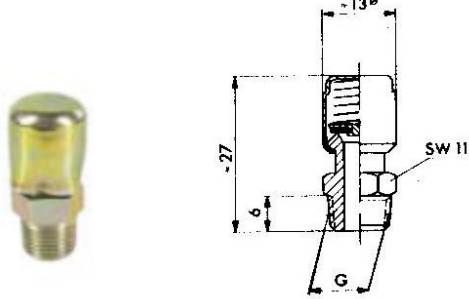
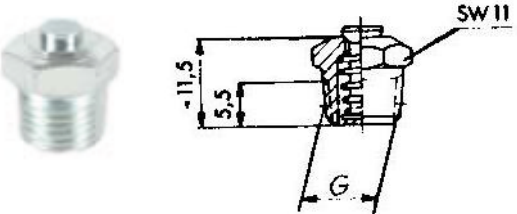
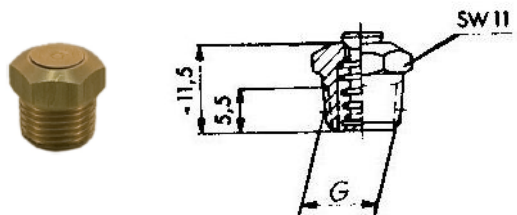
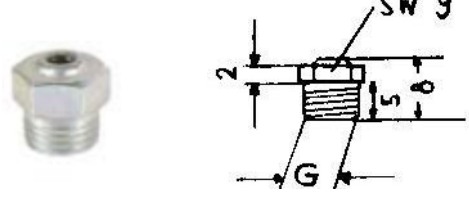
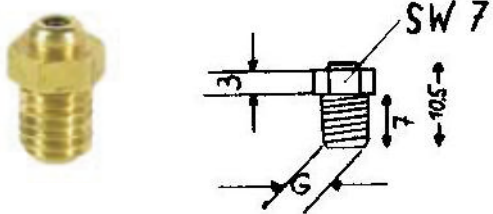


RELIEF VALVES

<p>CS.OLV.4087</p> <p>brass steel spring thread: M10 x1.0 / R 1/8" opening pressure: 0,025 – 0,035 bar max 200°C</p>	
<p>CS.OLV.4088</p> <p>brass steel spring thread: M10 x1.0 / R 1/8" opening pressure: ca 0,1 bar max 100°C</p>	
<p>CS.OLV.4089</p> <p>galvanized steel thread: M10 x1.0 / R 1/8" / 1/8" x 27NPT opening pressure: 3,2 – 5,6 bar</p>	
<p>CS.OLV.4089</p> <p>brass thread: M10 x1.0 / R 1/8" / 1/8" x 27NPT opening pressure: 3,2 – 5,6 bar</p>	
<p>CS.OLV.4090</p> <p>galvanized steel thread: M8x1,0 / M10 x1,0 opening pressure: 3,8 – 3,9 bar</p>	
<p>CS.OLV.4095</p> <p>brass thread: M6x1,0 / M8x1,0 opening pressure: 5,5 – 6 bar</p>	

Subject to change