

## VOYANT D'HUILE

### R.OV.245

Voyant d'huile,

En plastique transparent, châssis en acier chromé,

vis en acier galvanisé, étanchéité pour des températures jusqu'à 65 °C

Grandeur	1	2	3	4	5	6	7	8
Fil	4xMx4x12	4xM4x12	4xM5x15	6xM5x15	6xM5x15	8xM6x15	10xM6x20	12xM8x20
a	48	60	80	100	125	160	200	280
b	30	30	36	40	40	48	60	69
c	28	40	56	74	99	130	164	240
d	10	10	12	14	14	18	24	28
e	20	20.4	24	27	27	33	42	48
f	38	50	68.6	87.4	112.5	145	182	260
g	-	-	-	29	37.5	-	-	-
h	19	25	34.3	-	-	-	-	-
k	-	-	-	29	37.5	36	36	40
l	-	-	-	-	-	-	-	50



### R.OP.245/S





Voyant d'huile,

Châssis en aluminium poli. Identique au modèle 245, mais seulement en format(s) 1-6.

Grandeur	1	2	3	4	5	6
Fil	4xMx4x12	4xM4x12	4xM5x15	6xM5x15	6xM5x15	8xM6x15
a	48	60	80	100	125	160
b	30	30	36	40	40	48
c	28	40	56	74	99	130
d	10	10	12	14	14	18
e	20	20.4	24	27	27	33
f	38	50	68.6	87.4	112.5	145
g	-	-	-	29	37.5	-
h	19	25	34.3	-	-	-
k	-	-	-	29	37.5	36
l	-	-	-	-	-	-



Dichtung/joint

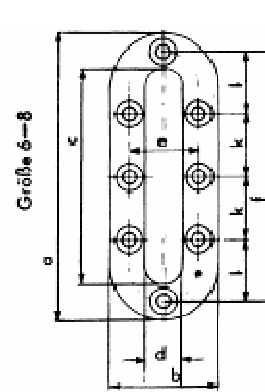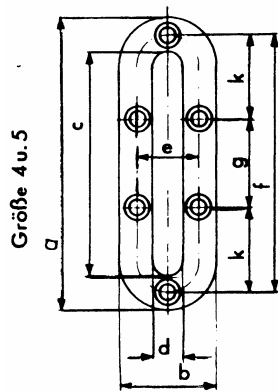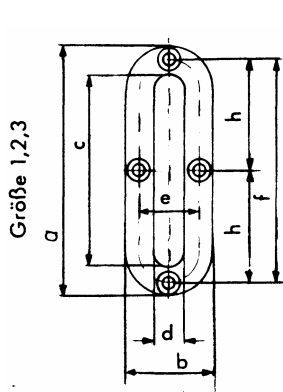

Sous réserve de modifications