


OLIEVENSTER

R.OV.249

Olievenster slijtvaste kunststof

Ovale uitvoering, glashelder, met witte buna-dichting als reflector (ook bestand tegen diesel-olie). Duidelijk af te lezen. Voor temperaturen tot 75°C, belastbaar tot 5 bar.

GROOTTE	SF 48	SF 60	SF 80	SF 100	SF 125	SF 160	SF 200	SF 250
B	30	30	36	40.3	40.5	48.5	50.5	50.5
L	48	60	80	102	127	162.5	202	252
S	8.2	8.5	9	9.5	9.5	10.5	10.5	10.5
a	20	20	24	27	27	33	32	32
b	19	25	34	-	-	-	-	-
c	5	5	6	7	7.7	8.8	8.5	8.5
d	-	-	-	29	37.8	36.3	32	37.2
e	-	-	-	30	36	36.3	40	40
d Ø	4.4	4.3	5.5	5.5	5.5	6.6	6.4	6.4
D Ø	7.7	7.7	9.7	9.7	9.7	10.7	10.7	10.7
t	2	2	2.5	2.5	2.5	3	3	3
Kijkopening	28x8.5	40x8.5	54x9.5	74x12	99x13	129x16	167.5x15	216.8x15
Bevestigingsgaten	4	4	4	6	6	8	10	12

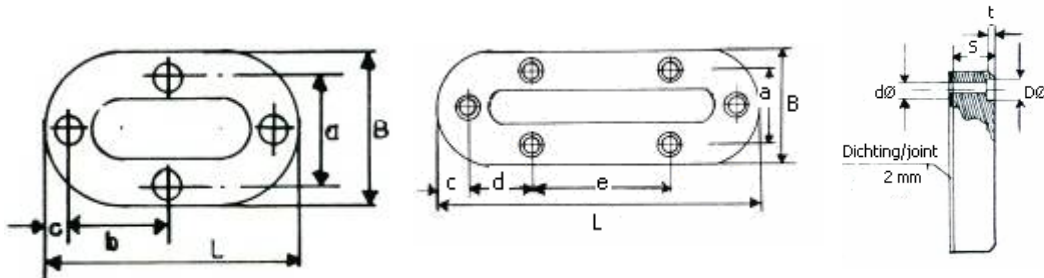


R.OV.250

Olievenster uit metaal

Rechthoekig model met ingezet gewoon glas, met sluiting. Duidelijke leesbaarheid. Ook bestand tegen diesel. Hittebestendig tot 130°C. Belastbaar tot 10 bar.

GROOTTE	SP 60	SP 80	SP 100	SP 125	SP 160	SP 200	SP 250
B	45	45	45	45	45	45	45
L	60	80	100	125	160	200	250
S	12	12	12	12	12	12	12
a	35	35	35	35	35	35	35
b	28	45	35	45	40	40	40
c	5	5	5	5	5	5	5
d Ø	5.5	5.5	5.5	5.5	5.5	5.5	5.5
Kijkopening	39x18	59x18	79x18	104x18	139x18	179x18	229x18
Bevestigingsgaten	4	4	6	6	8	10	12
Max druk (in bar)	42	32	32	32	32	22	22



Alle uitvoeringen onder voorbehoud van wijzigingen